

Winter 2019 CS 161 Exam II FORM 1

Please put your name, ID number and form number on the scantron, and leave the section number blank!!!!

Please use a No. 2 pencil to fill the scantron!!!!

True(A) / False(B) (28 pts, 2 pts each):

1. The name of an array stores the ^{addr.}value of the first array element. **F**
2. In a function with pass-by-reference parameters, the ^{addr.}values of the actual arguments are passed to the function. **F**
3. C++ performs array ^{does not} bounds checking, making it ~~is~~ possible for you to assign a pointer the address of an element out of the boundaries of an array. **F**
4. A recursive function can have ^{many} ~~at most one~~ base case. **F**
5. A recursive function must return a value. **F**
6. In some cases, using recursion enables you to give a natural, straightforward, simple solution to a program that would otherwise be difficult to solve. **T**
7. You should not assign a non-zero, random integer value to a pointer variable. **T**
8. Default arguments can be located ^{end} anywhere in the list of function parameters. **F** *fun(int a, int b)*
9. A static array name is a constant pointer because the address stored in it cannot be changed. **T**
10. Assume **array1** and **array2** are the names of two arrays. To assign the contents of **array2** to **array1**, you would use the following statement:
array1 = array2; **F**
11. The elements accessed using two square brackets ^{at j j} in a two-dimensional array are all the same data type. **T** *at j*
12. The C string **company** [¹³12] can hold 12 characters and a '\0' character. **F**
13. The size of a static array is defined at compile time. **T**
14. Just like pointers, you can change what any C++ reference refers to at any point. **F**

Multiple Choice (72 pts, 3 pts each)

15. If your program makes too many recursive function calls, your program will cause a _____.
A. compiler error
B. runtime error
C. syntax error
D. heap error

Questions 16-19 are based on the following code:

```
void read_strings( ③ , int size) {  
    for (int i = 0; i < size; i++)  
        cin >> array[i];  
}  
  
int main() {  
    string *arr = new string [5];  
    read_strings( ① , 5); //Function call  
    ② //Free memory  
    return 0;  
}
```

16. Which of the following is valid at ①?

- A. arr[5]
- B. arr
- C. *arr
- D. &arr

17. Which of the following will not give you a memory leak at ②?

- A. delete arr; ← array primitives
- B. delete arr [];
- C. delete [] arr;
- D. delete *arr; ← calls destructor

18. Which of the following is valid at ③?

- A. string *array;
- B. string &array;
- C. string arr[];
- D. A and C;

19. Assume ① - ③ are correct, is each element in **arr** filled after calling **read_strings**?

- A. Yes. The memory address of the array has been passed into the function, and therefore we can change the content in the original array.
- B. No. We passed the copy of the array into **read_strings**, and thus the content in the original array does not change.


20. If a C-style string variable **word** stores "apple", what will **strlen(word)** return?

- A. 0
- B. 4
- C. 5
- D. 6

Questions 21-25 are based on the following code:

```
void test( ① ){  
    // code  
}
```

```
int main () {  
    int a = 0;  
    int* ptr1 = &a;  
    int** ptr2 = &ptr1;  
    test( ② );  
    return 0;  
}
```

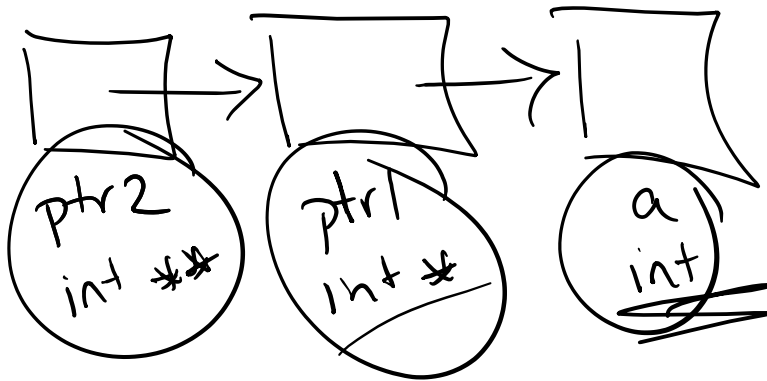

21. Which of the following should be filled into ② if ① is int &var ?

- A. &a or *ptr1
- B. a or ptr1
- C. a or *ptr1
- D. &a or ptr1

22. Which of the following should be filled into ② if ① is int *var ?

- A. &a or *ptr1
- B. a or ptr1
- C. a or *ptr1
- D. &a or ptr1

23. Which of the following should be filled into ② if ① is int **var ?

- A. *ptr1 or ptr2
- B. &ptr1 or *ptr2
- C. *ptr1 or *ptr2
- D. &ptr1 or ptr2

24. Which of the following should be filled into ① if ② is &ptr1 ?


- A. int var
- B. int *var
- C. int **var
- D. int ***var

25. Which of the following should be filled into ① if ② is &ptr2 ?

- A. int var
- B. int *var
- C. int **var
- D. int ***var

26. Given the definition and code fragment:

```
int matrix[2][3];
int k = 0;
for(int i = 0; i < 2; i++)
    for (int j = 0; j < 3; j++)
        matrix[i][j] = k++;
```

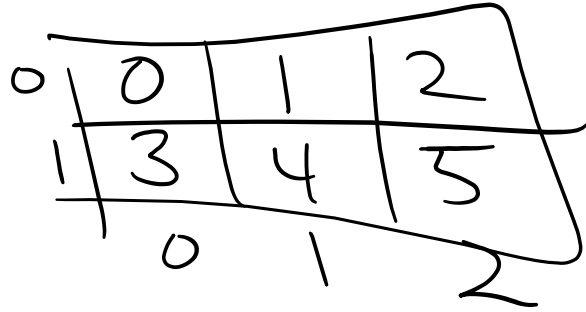


The value of `matrix[1][2]` is

- A. 2
- B. 3
- C. 4
- D. 5
- E. 6

27. What is the output of the following function call, given the function definition below?

```
int F(int n){
    if (n == 1)
        return 1;
    if (n == 2)
        return 2;
    if (n == 3)
        return 3;
    return F(n-1) + F(n-2) + F(n-3);
}
cout << F(5) << endl;
```

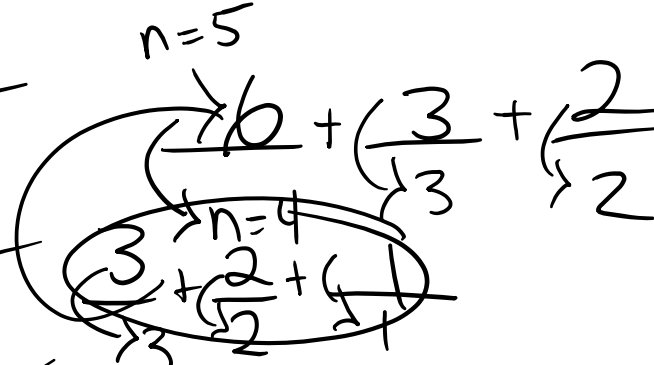


- A. 5
- B. 6
- C. 11
- D. 20

28. Assuming `ptr` is a pointer variable, what will the following statement output?

```
cout << *ptr;
```

- A. The value in the variable whose address is stored in `ptr`.
- B. The string "`*ptr`".
- C. The address of the variable whose address is stored in `ptr`.
- D. The address of the variable stored in `ptr`.

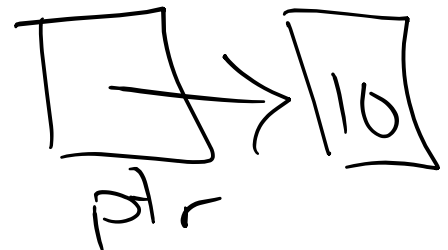

Questions 29-32 are based on the following code:

```
void func ( ① , int a, int b) {  
    //code  
}  
  
int main(){  
    int **two_d_arr = new int*[3];  
    for(int i = 0; i < 3; i++){  
        two_d_arr[i] = new int[4];  
        for(int j = 0; j < 4; j++){  
            two_d_arr[i][j] = 1;  
        }  
    }  
    func ( ② , 3, 4);  
    ③ //Free memory  
    return 0;  
}
```

rows
columns

29. C++ is row major, meaning that a two-dimensional array will be laid out by rows in memory. How many rows and columns does `two_d_arr` have, based on the code above?

- A. 3 rows, 4 columns
- B. 4 rows, 3 columns
- C. Cannot be defined
- D. None of the above

30. According to the code above, which of the following is correct?

- A. The double pointer `two_d_arr`, the row pointers, and the columns are all on the stack
- B. The double pointer `two_d_arr` and row pointers is on the stack, and the columns are on the heap
- C. The double pointer `two_d_arr` is on the stack, and the row pointers and columns are on the heap
- D. The double pointer `two_d_arr`, the row pointers, and the columns are all on the heap

31. Which of the following is valid for ① and ②?

- A. ① `int** array` ② `two_d_arr`
- B. ① `int** array` ② `&two_d_arr`
- C. ① `int array[3][4]` ② `two_d_arr`
- D. ① `int array[3][4]` ② `two_d_arr`

Static
stride

32. Which of the following will not give you a memory leak or segmentation fault at ③?

all cols for each row

- A. `for (int i = 0; i < 3; i++)
 delete [] two_d_arr[i];
 delete [] two_d_arr;`
- B. `for (int i = 0; i < 4; i++)
 delete [] two_d_arr[i];`
- C. `delete [] two_d_arr;`
- D. `delete [][] two_d_arr;`

row pointers

33. What is the output of the following code, given the function definitions below?

```
void tester (int a, int &b) {  
    int c = 0;  
    c = a + 2;  
    a = 3 * 3;  
    b = c + a;  
}
```

3 2 it can change x

```
int main () {  
    int x = 2, y = 3;  
    tester(y, x);  
    cout << x << " " << y << endl;  
    return 0;  
}
```

- A. 23
- B. 2 10
- C. 14 3
- D. 14 9

34. Which of the following statement is valid C++ code?

- ~~A. `int num = 0;
int ptr = #`~~
- ~~B. `float *ptr = 10.04;`~~
- ~~C. `char word1[5] = "word";
char word2[10] = "computer";
word1 = word2;`~~
- D. None of the above

35. Which of the following is a valid C string declaration?

- ~~A. `char array[5] = "hello" ;`~~
- ~~B. `char array[4] = "hello";`~~
- C. `char array[] = "hello";`
- D. None of the above

~~char array[5] = {'h','e','l','l','o'}~~
not a string

36. Which of the following is a valid C++ array declaration?

- A. `int []array;`
- B. `float payments[10.23];`
- C. `string numbers[];`
- D. `double scores[25];`


37. Which of the following statement is true about function overloading?

- ~~A. Overloaded functions may have the same name, same parameters, and same return type.~~
- B. Overloaded functions may have the same name, same return type, but different parameters.
- ~~C. Overloaded functions may have the same name, same parameters, but different return type.~~
- D. B and C

38. What does the following statement do?

```
int *ptr = NULL;
```


- A. Create a variable named ~~ptr~~ that will store an integer value.
- B. Create a variable named ~~ptr~~ that will store an asterisk (*) and an integer value.
- C. Create a pointer variable named **ptr** that will store the address of an integer variable.
- D. Create a variable named ~~ptr~~ that will store the **NULL** value.



Extra Credit (2 pts each):

39. What is wrong with the following code?

```
int *p1, *p2;  
p1 = new int;  
p2 = new int;  
*p1 = 11;  
*p2 = 0;  
delete p2;  
p2 = p1;  
delete p1;
```

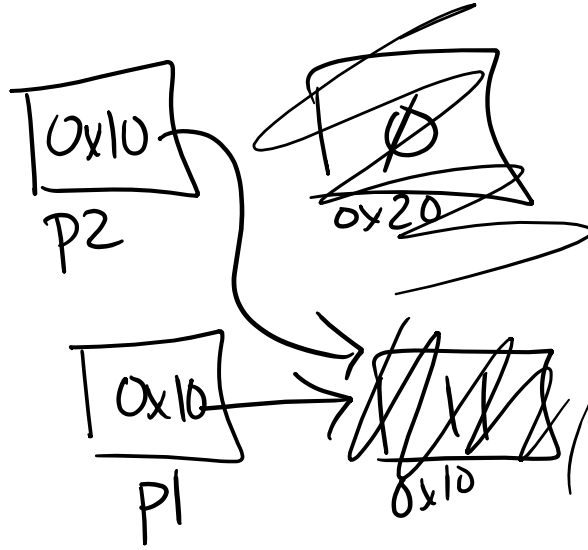

- A. nothing
- B. cannot reuse p2 after deleting it
- C. You have a memory leak, since p2 is not deleted after re-assigned.
- D. B and C

40. Which of the following is true about this statement:

```
sum += *array++;
```

- ~~A. This statement is illegal in C++.~~
- B. This statement adds the dereferenced pointer's value to sum, then increments the address stored in the pointer.
- C. This statement increments the dereferenced pointer's value by one, then adds that value to sum.
- D. None of the above

41. What is the output of the following code?

```
int array[2][3];
```

```
for(int i = 0; i < 2; i++){  
    for(int j = 0; j < 3; j++){  
        array[i][j] = i + j;  
        cout << array[i][j] << " ";  
    }  
    cout << endl;
```

0	1	2
1	2	3

A. 0 1 2
1 2 3

B. 0 1
1 2
2 3

C. 0 0 0
1 1 1

D. 0 0
1 1
2 2

C++ == > <

42. True(A)/False(B) You may use strcmp() to compare all the elements between two C-style strings.

43. True(A)/False(B) Elements in a two-dimensional static array have contiguous memory on the heap.

0 when equal
+/- when >, <