

CS 331: Artificial Intelligence

Propositional Logic I

1

Knowledge-based Agents

- Can **represent** knowledge
- And **reason** with this knowledge
- How is this different from the knowledge used by problem-specific agents?
 - More general
 - More flexible

2

Outline

1. Knowledge-based Agents
2. The Wumpus World
3. Logic

3

Knowledge-based Agents

- Knowledge of problem solving agents is specific and inflexible
- Knowledge-based agents can benefit from knowledge expressed in very general forms, combining information in different ways to suit different purposes
- Knowledge-based agents can combine general knowledge with current percepts to infer hidden aspects of the current state

4

Knowledge-based Agents

Flexibility of knowledge-based agents:

- Accept new tasks in the form of explicitly described goals
- Achieve competence quickly by being told or learning new knowledge about the environment
- Adapt to changes in the environment by updating the relevant knowledge


5

Knowledge is definite

- Knowledge of logical agents is always definite
- That is, each proposition is entirely true or entirely false
- Agent may be agnostic about some propositions
- Logic doesn't handle uncertainty well

6


The Knowledge Base (KB)



- A knowledge base is a set of “sentences”
- Each sentence is expressed in a knowledge representation language and represents some assertion about the world

7


The Knowledge Base (KB)



- Need to add new sentences to the knowledge base (this task is called TELL)
- Need to query what is known (this task is called ASK)

8

Knowledge Base Example

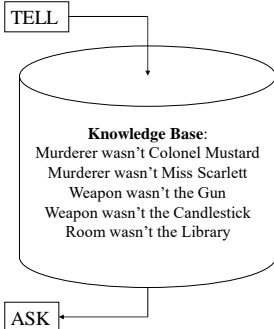

When you discover a new fact like “The murder room wasn't the study”, you would TELL the KB

You can then ASK the KB what to ask next


9

Inference

- Inference: deriving new sentences from old ones
- Must obey fundamental requirement: when one ASKS a question of the knowledge base, answer should follow from what has been TELLED to the KB previously


10

A Generic Knowledge-based Agent




11

A Generic Knowledge-based Agent

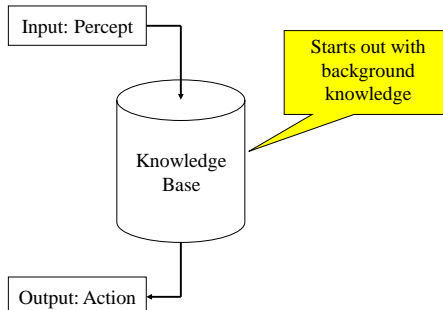


12

A Generic Knowledge-based Agent

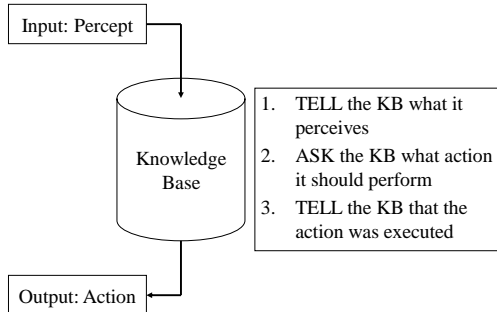

13

The Wumpus World



- Wumpus eats anyone that enters its room
- Wumpus can be shot by an agent, but agent has one arrow
- Pits trap the agent (but not the wumpus)
- Agent's goal is to pick up the gold

14

The Wumpus World

- **Performance measure:**
 - +1000 for picking up gold, -1000 for death (meeting a live wumpus or falling into a pit)
 - -1 for each action taken, -10 for using arrow
- **Environment:**
 - 4x4 grid of rooms
 - Agent starts in (1,1) and faces right
 - Geography determined at the start:
 - Gold and wumpus locations chosen randomly
 - Each square other than start can be a pit with probability 0.2

15

The Wumpus World

- **Actuators:**
 - Movement:
 - Agent can move forward
 - Turn 90 degrees left or right
 - Grab: pick up an object in same square
 - Shoot: fire arrow in straight line in the direction agent is facing

16

The Wumpus World

- **Sensors:**
 - Returns a 5-tuple of five symbols eg. [stench, breeze, glitter, bump, scream] (note that in this 5-tuple, all five things are present. We indicate absence with the value None)
 - In squares adjacent to the wumpus, agent perceives a stench
 - In squares adjacent to a pit, agent perceives a breeze
 - In squares containing gold, agent perceives a glitter
 - When agent walks into a wall, it perceives a bump
 - When wumpus is killed, it emits a woeful scream that is perceived anywhere

17

The Wumpus World

- Biggest challenge: Agent is ignorant of the configuration of the 4x4 world
- Needs logical reasoning of percepts in order to overcome this ignorance
- Note: retrieving gold may not be possible due to randomly generated location of pits
- Initial knowledge base contains:
 - Agent knows it is in [1,1]
 - Agent knows it is a safe square

18

The Wumpus World Environment Properties

- Fully or Partially observable?
- Deterministic or stochastic?
- Episodic or sequential?
- Static or dynamic?
- Discrete or continuous?
- Single agent or multiagent?

19

Wumpus World Example

1,4	2,4	3,4	4,4
1,3	2,3	3,3	4,3
1,2	2,2	3,2	4,2
OK			
1,1	2,1	3,1	4,1
OK	OK		

A = Agent
B = Breeze
G = Glitter, Gold
OK = Safe square
P = Pit
S = Stench
V = Visited
W = Wumpus

1,4	2,4	3,4	4,4
1,3	2,3	3,3	4,3
1,2	2,2 P?	3,2	4,2
OK			
1,1	2,1	3,1 P?	4,1
V	OK	A B	OK

20

Wumpus World Example

1,4	2,4	3,4	4,4
1,3	2,3	3,3	4,3
1,2	2,2	3,2	4,2
OK			
1,1	2,1	3,1	4,1
A			
OK	OK		

1st percept is:

[None, None, None, None, None]

(Corresponding to [Stench, Breeze, Glitter, Bump, Scream])

Agent concludes squares [1,2], [2,1] are safe. We mark them with OK. A cautious agent will move only to a square that it knows is OK.

Agent now moves to [2,1]

A = Agent
B = Breeze
G = Glitter, Gold
OK = Safe square
P = Pit
S = Stench
V = Visited
W = Wumpus

21

Wumpus World Example

1,4	2,4	3,4	4,4
1,3	2,3	3,3	4,3
1,2	2,2 P?	3,2	4,2
OK			
1,1	2,1	3,1 P?	4,1
V	OK	A B	OK

2nd percept is:

[None, Breeze, None, None, None]

Must be a pit at [2,2] or [3,1] or both. We mark this with a P?.

Only one square that is OK, so the agent goes back to [1,1] and then to [1,2]

A = Agent
B = Breeze
G = Glitter, Gold
OK = Safe square
P = Pit
S = Stench
V = Visited
W = Wumpus

22

Wumpus World Example

1,4	2,4	3,4	4,4	
1,3	W!	2,3	3,3	4,3
1,2	A	2,2	3,2	4,2
S	OK			
OK		OK		
1,1	2,1	3,1 P?	4,1	
V	B	V		
OK	OK	OK		

3rd percept is:

[Stench, None, None, None, None]

Wumpus must be nearby. Can't be in [1,1] (by rules of the game) or [2,2] (otherwise agent would have detected a stench at [2,1])

Therefore, Wumpus must be in [1,3]. Indicate this by W!.

Lack of breeze in [1,2] means no pit in [2,2], so pit must be in [3,1].

A = Agent
B = Breeze
G = Glitter, Gold
OK = Safe square
P = Pit
S = Stench
V = Visited
W = Wumpus

23

Wumpus World Example

1,4	2,4	3,4	4,4	
1,3	W!	2,3	3,3	4,3
1,2	A	2,2	3,2	4,2
S	OK			
OK		OK		
1,1	2,1	3,1 P?	4,1	
V	B	V		
OK	OK	OK		

Note the difficulty of this inference:

- Combines knowledge gained at different times and at different places.
- Relies on the lack of a percept to make one crucial step

At this point, the agent moves to [2,2].

A = Agent
B = Breeze
G = Glitter, Gold
OK = Safe square
P = Pit
S = Stench
V = Visited
W = Wumpus

24

Wumpus World Example

1,4	2,4	3,4	4,4
1,3	W!	2,3	3,3
1,2	S	2,2	3,2
1,1	V	2,1	3,1
	OK		

We'll skip the agent's state of knowledge at [2,2] and assume it goes to [2,3].

Agent detects a glitter in [2,3] so it grabs the gold and ends the game

Note: In each case where the agent draws a conclusion from the available information, that conclusion is guaranteed to be correct if the available information is correct

A = Agent
B = Breeze
G = Glitter, Gold
OK = Safe square
P = Pit
S = Stench
V = Visited
W = Wumpus

25

Logic

Logic must define:

1. Syntax of the representation language
 - Symbols, rules, legal configurations
2. Semantics of the representation language
 - Loosely speaking, this is the "meaning" of the sentence
 - Defines the truth of each sentence with respect to each possible world
 - Everything is either true or false, no in between

26

Models

- We will use the word model instead of "possible world"
- "m is a model of α " means that sentence α is true in model m
- Models are mathematical abstractions which fix the truth or falsehood of every relevant sentence
- Think of it as the possible assignments of values to the variables
 - E.g. the possible models for $x + y = 4$ are all possible assignments of numbers to x and y such that they add up to 4

27

Entailment

$\alpha \models \beta$ means α entails β i.e. β follows logically from α , where α and β are sentences

Mathematically, $\alpha \models \beta$ if and only if in every model in which α is true, β is also true.

Another way: if α is true, then β must also be true.

28


Entailment Applied to the Wumpus World

1,4	2,4	3,4	4,4
1,3	2,3	3,3	4,3
1,2	2,2	3,2	4,2
	OK		
1,1	V	2,1	3,1
	OK		

- Suppose the agent moves to [2,1]
- Agent knows there is nothing in [1,1] and a breeze in [2,1]
- These percepts, along with the agent's knowledge of the rules of the wumpus world constitute the KB
- Given this KB, agent is interested if the adjacent squares [1,2], [2,2] and [3,1] contain pits.

29

Entailment Applied to the Wumpus World



$2^3 = 8$ possible models because [1,2], [2,2] and [3,1] can take each take values true or false that there is a pit there

The 3 models inside the line marked KB are those in which the KB is true

30

Entailment Applied to the Wumpus World

Let us consider the models that support the conclusion $\alpha_1 =$ "There is no pit in [1,2]." We draw a line marked with α_1 around these models

In every model in which KB is true, α_1 is also true. Therefore $KB \models \alpha_1$

31

Entailment applied to the Wumpus World

Now let us consider the models that support the conclusion $\alpha_2 =$ "There is no pit in [2,2]." We draw a line marked with α_2 around these models

In some models in which KB is true, α_2 is false. Therefore $KB \not\models \alpha_2$ and the agent cannot conclude that there is no pit in [2,2]

32

Modified Wumpus World

- Breeze occurs in squares directly or diagonally adjacent to a pit



33

CW: Modified Wumpus Exercise

- KB includes modified rules plus:

2,1 S V OK	2,2	2,3
1,1 V OK	1,2 B,S V OK	1,3

- Want to reason about squares [2,2], [2,3], [1,3]. Are these sentences entailed?
 - S1: There is a wumpus in [2,2].
 - S2: There is a pit in [1,3].

34

Logical inference

- Entailment can be applied to derive conclusions (we call this carrying out **logical inference**)
- Model checking**: enumerates all possible models to check that α is true in all models in which KB is true
- If an inference algorithm i can derive α from the KB, we write $KB \vdash_i \alpha$
- The above is pronounced " α is derived from KB by i " or " i derives α from KB"

35

Soundness

- An inference algorithm that derives only entailed sentences is called **sound** or **truth-preserving**
- Soundness is a good thing!
- If an inference algorithm is unsound, you can make things up as it goes along and derive basically anything it wants to



This (unsoundness) is most illogical

36

Completeness

- An inference algorithm is **complete** if it can derive any sentence that is entailed
- For some KBs, the number of sentences can be infinite
- Can't exhaustively check all of them, need to rely on proving completeness

37

In Summary

- **Soundness**: i is sound if whenever $KB \vdash_i \alpha$, it is also true that $KB \models \alpha$
- **Completeness**: i is complete if whenever $KB \models \alpha$, it is also true that $KB \vdash_i \alpha$

38

Propositional Logic: Syntax and Semantics

39

Syntax: Backus-Naur Form grammar of sentences in propositional logic

Sentence \rightarrow AtomicSentence | ComplexSentence

AtomicSentence \rightarrow **True** | **False** | Symbol

Symbol \rightarrow **P** | **Q** | **R** | ...

ComplexSentence \rightarrow \neg Sentence

| (Sentence \wedge Sentence)

| (Sentence \vee Sentence)

| (Sentence \Rightarrow Sentence)

| (Sentence \Leftrightarrow Sentence)

40

Atomic Sentences

- The indivisible syntactic elements
- Consist of a single propositional symbol e.g. P, Q, R that stands for a proposition that can be true or false e.g. P=true, Q=false
- We also call an atomic sentence a **literal**
- 2 special propositional symbols:
 - True (the always true proposition)
 - False (the always false proposition)

41

Complex Sentences

- Made up of sentences (either complex or atomic)
- 5 common logical connectives:
 - \neg (not): negates a literal
 - \wedge (and): conjunction e.g. $P \wedge Q$ where P and Q are called the conjuncts
 - \vee (or): disjunction e.g. $P \vee Q$ where P and Q are called the disjuncts
 - \Rightarrow (implies): e.g. $P \Rightarrow Q$ where P is the premise/antecedent and Q is the conclusion/consequent
 - \Leftrightarrow (if and only if): e.g. $P \Leftrightarrow Q$ is a biconditional

42

Precedence of Connectives

- In order of precedence, from highest to lowest: \neg , \wedge , \vee , \Rightarrow , \Leftrightarrow
- E.g. $\neg P \vee Q \wedge R \Rightarrow S$ is equivalent to $((\neg P) \vee (Q \wedge R)) \Rightarrow S$
- You can rely on the precedence of the connectives or use parentheses to make the order explicit
- Parentheses are necessary if the meaning is ambiguous

43

Semantics (Are sentences true?)

- Defines the rules for determining if a sentence is true with respect to a particular model
- For example, suppose we have the following model: $P=\text{true}$, $Q=\text{false}$, $R=\text{true}$
- Is $(P \wedge Q \wedge R)$ true?

I want the truth!



44

Semantics

For atomic sentences:

- True is true, False is false
- A symbol has its value specified in the model

For complex sentences (for any sentence S and model m):

- $\neg S$ is true in m iff S is false in m
- $S_1 \wedge S_2$ is true in m iff S_1 is true in m **and** S_2 is true in m
- $S_1 \vee S_2$ is true in m iff S_1 is true in m **or** S_2 is true in m
- $S_1 \Rightarrow S_2$ is true in m iff S_1 is false in m **or** S_2 is true in m
i.e., can translate it as $\neg S_1 \vee S_2$
- $S_1 \Leftrightarrow S_2$ is true iff $S_1 \Rightarrow S_2$ is true in m **and** $S_2 \Rightarrow S_1$ is true in m

45

Note on implication

- $P \Rightarrow Q$ seems weird... doesn't fit intuitive understanding of "if P then Q "
- Propositional logic does not require causation or relevance between P and Q
- Implication is true whenever the antecedent is false (remember $P \Rightarrow Q$ can be translated as $\neg P \vee Q$)
 - Implication says "if P is true, then I am claiming that Q is true. Otherwise I am making no claim"
 - The only way for this to be false is if P is true but Q is false

46

Truth Tables for the Connectives

P	$\neg P$
false	true
true	false

P	Q	$P \wedge Q$	$P \vee Q$	$P \Rightarrow Q$	$P \Leftrightarrow Q$
false	false	false	false	true	true
false	true	false	true	true	false
true	false	false	true	false	false
true	true	true	true	true	true

With the truth tables, we can compute the truth value of any sentence with a recursive evaluation e.g.

Suppose the model is $P=\text{false}$, $Q=\text{false}$, $R=\text{true}$

$$\neg P \wedge (Q \vee R) = \text{true} \wedge (\text{false} \vee \text{true}) = \text{true} \wedge \text{true} = \text{true}$$

47

The Wumpus World KB (only dealing with knowledge about pits)

For each i, j :

Let P_{ij} be true if there is a pit in $[i, j]$

Let B_{ij} be true if there is a breeze in $[i, j]$

The KB contains the following sentences:

1. There is no pit in $[1,1]$:
 $R_1: \neg P_{1,1}$
2. A square is breezy iff there is a pit in a neighboring square: (not all sentences are shown)
 $R_2: B_{1,1} \Leftrightarrow P_{1,2} \vee P_{2,1}$
 $R_3: B_{2,1} \Leftrightarrow (P_{1,1} \vee P_{2,2} \vee P_{3,1})$
:

48

The Wumpus World KB

3. We add the percepts for the first two squares ([1,1] and [2,1]) visited in the Wumpus World example:

$R_4: \neg B_{1,1}$

$R_5: B_{2,1}$

The KB is now a conjunction of sentences $R_1 \wedge R_2 \wedge R_3 \wedge R_4 \wedge R_5$ because all of these sentences are asserted to be true.

49

Inference

- How do we decide if $KB \models \alpha$?
- Enumerate the models, check that α is true in every model in which KB is true

$B_{1,1}$	$B_{2,1}$	$P_{1,1}$	$P_{1,2}$	$P_{2,1}$	$P_{2,2}$	$P_{3,1}$	R_1	R_2	R_3	R_4	R_5	KB
false	false	false	false	false	false	false	true	true	true	true	false	false
false	false	false	false	false	false	true	true	true	false	true	false	false
:	:	:	:	:	:	:	:	:	:	:	:	:
false	true	false	false	false	false	false	true	true	false	true	true	false
false	true	false	false	false	false	true	true	true	true	true	true	true
false	true	false	false	false	true	false	true	true	true	true	true	true
false	true	false	false	false	true	true	true	true	true	true	true	true
false	true	false	false	true	false	false	true	false	false	true	true	false
:	:	:	:	:	:	:	:	:	:	:	:	:
true	true	true	true	true	true	true	false	true	true	false	true	false

Inference

- Suppose we want to know if $KB \models \neg P_{1,2}$?
- In the 3 models in which KB is true, $\neg P_{1,2}$ is also true

$B_{1,1}$	$B_{2,1}$	$P_{1,1}$	$P_{1,2}$	$P_{2,1}$	$P_{2,2}$	$P_{3,1}$	R_1	R_2	R_3	R_4	R_5	KB
false	false	false	false	false	false	false	true	true	true	true	false	false
false	false	false	false	false	false	true	true	true	false	true	false	false
:	:	:	:	:	:	:	:	:	:	:	:	:
false	true	false	false	false	false	false	true	true	false	true	true	false
false	true	false	false	false	false	true	true	true	true	true	true	true
false	true	false	false	false	true	false	true	true	true	true	true	true
false	true	false	false	false	true	true	true	true	true	true	true	true
false	true	false	true	false	false	true	true	false	false	true	true	false
:	:	:	:	:	:	:	:	:	:	:	:	:
true	true	true	true	true	true	true	false	true	true	false	true	false

51

Things you should know

- Properties of a knowledge-based agent
- What a knowledge-base is
- What entailment and inference mean
- Desirable properties of inference algorithms such as soundness and completeness

52